

SUREBONDER

Uses 1/4", 5/16", 3/8", 1/2", 9/16" staples & 9/16" Brad & Pin Nails

Heavy Duty Staple Gun

Uses SUREBONDER® No. 4 Staples, No. 8 Brads, No. 9 Pins & Arrow® T50® staples.

Loading Instructions

Turn staple gun upside down, squeeze the track release and pull out (Fig. 1). Determine length of staple to be used. Leg Length should be 2 1/2 times longer than thickness of material being stapled. Drop staples or nails into staple chamber with points facing up (Fig. 2). Note: When loading Brad or Pin Nails, they must be in contact with the Load side of Staple Chamber (Fig. 3). Push track closed. Staple gun WILL NOT close if loaded incorrectly.

Operating Instructions

Place staple gun on area to be stapled. With downward pressure on staple gun, squeeze handle until staple or nail is set. Staple viewer indicates amount of staples left in chamber.



ANSI Z87.1

Safety Instructions

Always wear safety glasses. Keep out of reach of children. Watch out for potential hazards such as electrical wires. Never point staple gun or shoot staples at people. Read all instructions before operating.

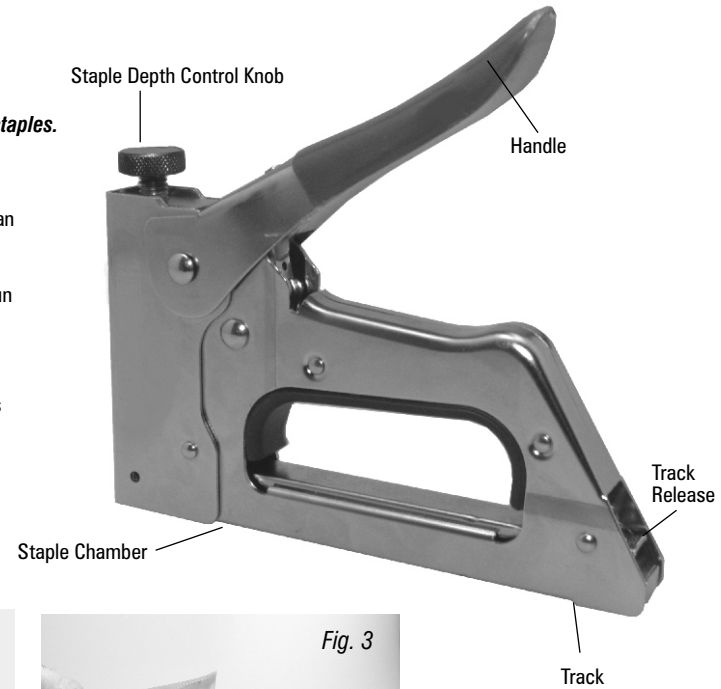


Fig. 1

Squeeze track release and pull out



Fig. 2

Load staples or nails with leg points up



Fig. 3

Nails must be in contact with load side of chamber

IMPORTANT: If you are experiencing operating difficulties, please call toll free at 1-800-860-3838 before returning this product to place of purchase.

FPC Corporation • 355 Hollow Hill Drive • Wauconda, IL 60084
www.surebonder.com • e-mail: sales@surebonder.com